


LLC SERIES

Lucas LED Curtain

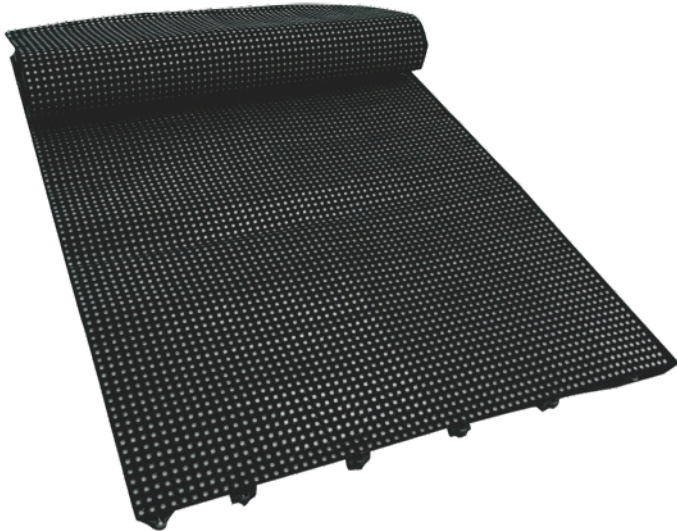

· LED cloth

The body material is made by light luxury DFR velvet drapery, and can be folded like a cloth.

· Customized size and shape



Pixel pitch can be customized and different shapes is available, such as circle, triangle, round...

· Small volume for transportation

20 sq.m can be contained in one case, saving 60% labor cost and transport fee.

· Quick setup

Velcro connection for fast setup and tear down, saving 80% labour cost.

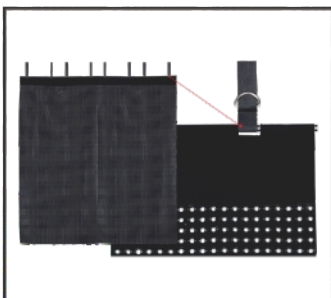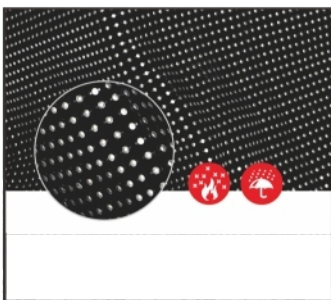



Specification

Model No	LLC-3000	LLC-2500	LLC-1600	LLC-1000	LLC-700	LLC-400	LLC-200	LLC-200A	LLC-100
Pixel pitch	18.25 mm	20 mm	25 mm	30 mm	37.5 mm	50 mm	75 mm	75 mm	100 mm
Pixel density	3,002 pixel/m ²	2,500 pixel/m ²	1,600 pixel/m ²	1,111 pixel/m ²	711 pixel/m ²	400 pixel/m ²	176 pixel/m ²		100 pixel/m ²
Pixel configuration	RGB 3-IN-1 SMD LED							2R2G2B DIP	RGB 3-IN-1 SMD LED
Brightness(White)	3,080 nit	2,700 nit	1,730 nit	1,200 nit	770 nit	220 nit	86 nit	265 nit	55 nit
Optimal visual distance	12 m	15 m	18 m	22 m	28 m	37 m	55 m	55 m	75 m
Recommended size W=Width H=Height T=Thickness	W: 1,168mm H: 2,336mm T: 10mm	W: 1,280mm H: 2,560mm T: 10mm	W: 1,600mm H: 2,400mm T: 10mm	W: 1,440mm H: 2,400mm T: 10mm	W: 1,200mm H: 2,400mm T: 10mm	W: 1,600mm H: 2,400mm T: 10mm	W: 2,400mm H: 2,400mm T: 10mm	W: 2,400mm H: 2,400mm T: 10mm	W: 3,200mm H: 3,200mm T: 10mm
Max power consumption	78 W/m ²	68 W/m ²	45 W/m ²	30 W/m ²	20 W/m ²	12 W/m ²	5 W/m ²	20 W/m ²	3 W/m ²
Average power consumption	26 W/m ²	23 W/m ²	15 W/m ²	10 W/m ²	7 W/m ²	4 W/m ²	2 W/m ²	7 W/m ²	1 W/m ²
Weight	9.0 kgs/m ²	8.2 kgs/m ²	7.0 kgs/m ²	5.5 kgs/m ²	4.3 kgs/m ²	2.7 kgs/m ²	2.5 kgs/m ²	3.2 kgs/m ²	2.1 kgs/m ²
Power input	100~240VAC,50/60Hz								
Gray scale	12 bit								
Refresh rate	1,920 Hz								
View angle	Horizontal: 120°; Vertical: 120°								
Drive mode	Constant current								
Signal input	AV,S-video,VGA,CVBS,HPMI,DVI,etc								
Body material	DFR velvet drapery								
IP rating	IP 54								
Operating temp / Humidity	- 40 ~ + 60 °C/10% ~ 90% RH								
Installation	Hang								
Package	Flight case(Carton optional)								