



- ◎ **Super Slim**
- ◎ **Super Lightweight**
- ◎ **Budget friendly**




● **Cabinet size:**

500x500mm 500x1000mm are both available.




Seamless and mixed installation.

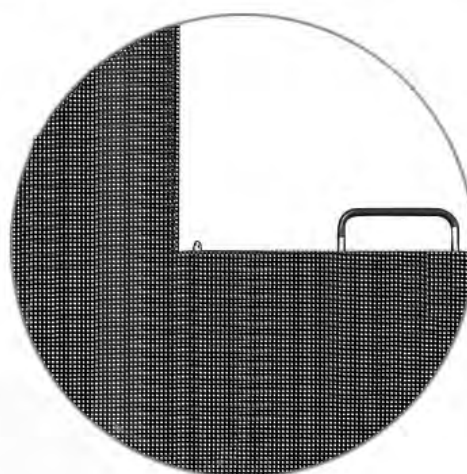

● **Fast & Seamless assembly by hand without tools**



- Stacking and Hanging Installation are Available

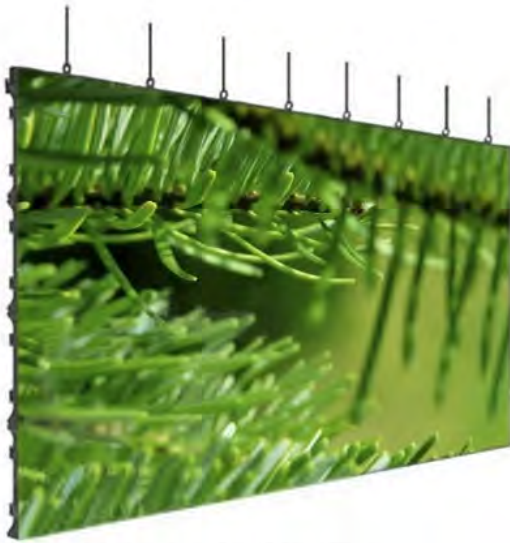


Hanging Installation




Stacking Installation

- Easy concave and convex for curve installation (LI 2 , LI 3 , LI 6)

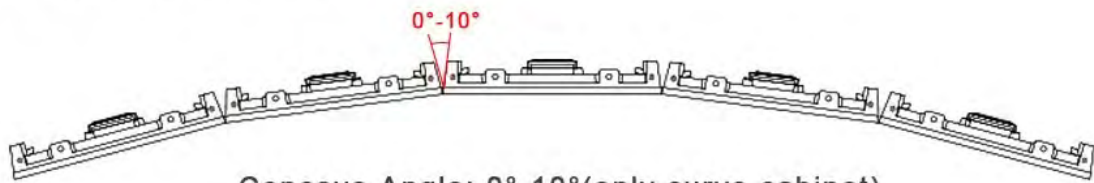

Concave Angle: 0°-10°(only curve cabinet).

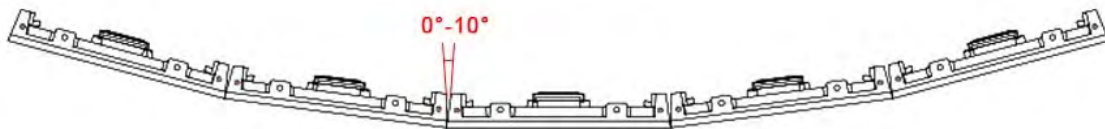

Convex Angle: 0°-10°(only curve cabinet).



Item	LI 2	LI 3	LI 6
Pixel pitch	2.97mm	3.91mm	6.25mm
LED type	SMD2121/ 1515 Black	SMD2121 Black	SMD3528
Module size	250x250mm	250x250mm	250x250mm
Module resolution	84x84	64x64	40x40
Cabinet resolution	168x336 / 168x168	128x256 / 128x128	80x160 / 80x80
Cabinet size(W x H)	500x1000mm / 500x500mm	500x1000mm / 500x500mm	500x1000mm / 500x500mm
Density	112,896 dots/m ²	65,536 dots/m ²	25,600dots/m ²
Brightness	≥1100 NIT	≥1200 NIT	≥1600 NIT
Scan	1/28	1/16	1/10
Max power consumption	560 W/m ²	520 W/m ²	480 W/m ²
Ave power consumption	230W/m ²	180W/m ²	170W/m ²
Cabinet weight	13.5 KG / 8.5KG	13.5 KG / 8.5KG	13.5 KG / 8.5KG
Refresh rate	≥1920Hz	≥1920Hz	≥1920Hz
View angle(Horizontal/Vertical)	140°/140°	140°/140°	140°/140°
Working voltage	AC 210v~240v 50-60Hz	AC 210v~240v 50-60Hz	AC 210v~240v 50-60Hz
Operation temperature	-20°C ~ +50°C	-20°C ~ +50°C	-20°C ~ +50°C
Operation Humdity	10% ~ 90%	10% ~ 90%	10% ~ 90%
Protection level	IP31/IP31	IP31/IP31	IP31/IP31